


CLASSIC TEXTURE

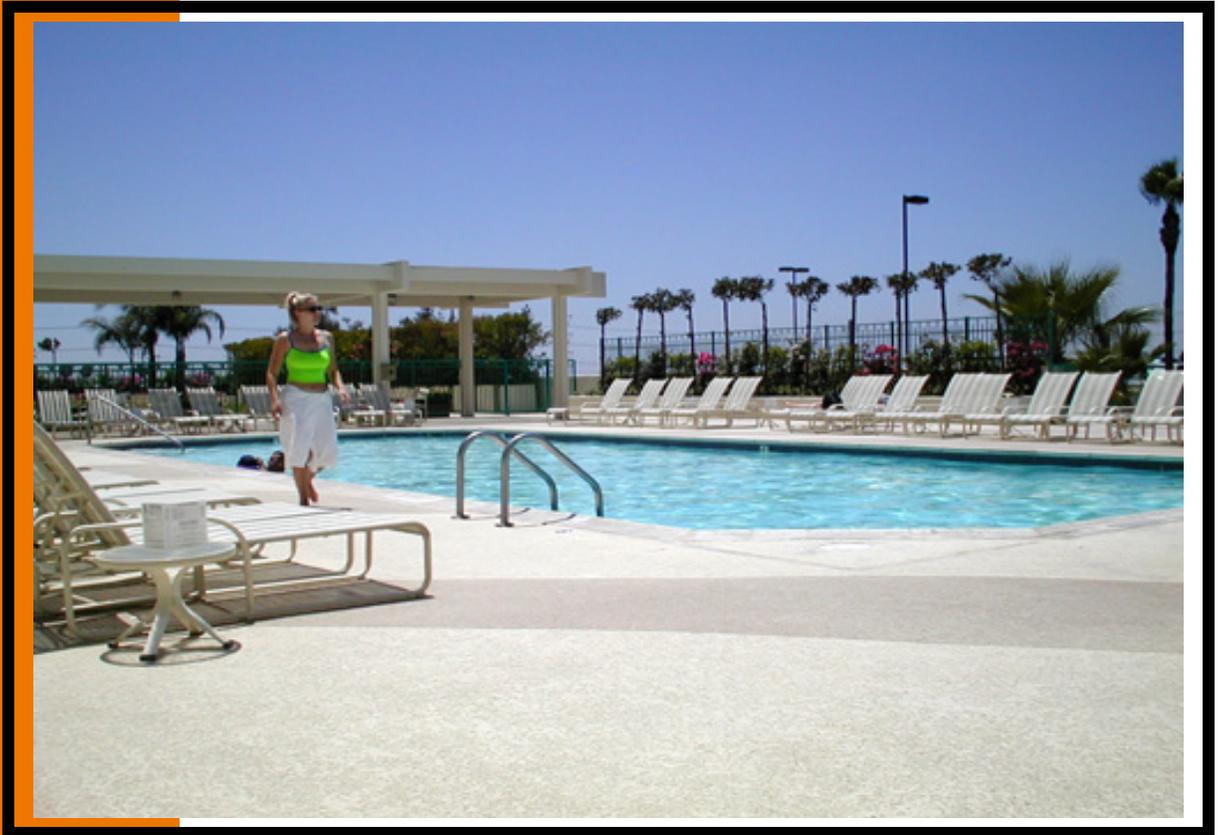

*The Acrylic
Spray Texture
System That
Started It All in
1970.*

DESCRIPTION

The Sundeak Classic Texture is the decorative concrete application that helped launch an industry. If you've ever walked across a textured pool deck in your lifetime and it was comfortable and safe, the chances are great that it was Sundeak. Classic Texture can be combined with Custom Scoreline, Masonry effects, Aggregate Effects, SunStamp, Tuscan and all other applications to enhance your project.

Benefits of choosing Sundeak Classic Texture:

- Slip-resistant coatings for your protection
- Cooler under foot than most concrete surfaces
- Non-porous applications for ease of maintenance and care
- Unlimited designs and colors to fit your style and imagination
- A guarantee on the installation provided by Sundeak contractors



Sundek Products Needed

- **Sundek Additive.**
- **Sundek Premix**
- **Sundek Finish Coat**
- **Sundek Finish Coat Clear (optional)**

Product Description

Sundek Additive – A low solids binding polymer.

Sundek Premix – A polymer-modified cement mixture with medium grade sand.

Sundek Finish Coat – An acrylic water-base color dispersion.

Sundek Clear – An acrylic water base sealer (30% solids)

Application Instructions

Etch, grind or shot blast the concrete substrate to achieve an ICRI Concrete Surface Profile (CSP) of 2-3, resembling 80-100 grit sandpaper. Pressure wash, squeegee excess water and allow drying until there are no visible signs of water. Slab and ambient temperature above 40°F and rising, staying above 40°F at least 4 hours after application is completed. Apply a primer if needed. Perform all necessary repairs and install Sundek base coat. A second coat may be applied if required by substrate conditions. Spray Sundek Classic Texture mix to surface. When completely dry, detail and scrape surface to remove any burrs or imperfections, in preparation for Finish Coat application. Apply Finish coat over the entire surface in one direction. Once the first application has dried, apply a second coat in the opposite direction, (north-south, and then east-west). Apply Sundek Finish Coat Clear sealer (with anti-slip agent as appropriate) for added protection.