


## SunRestore Stamp Concrete Rehab



### DESCRIPTION

SunRestore Stamp Concrete Rehab is a system providing a complete ‘make-over’ for stamped concrete. The system covers the spectrum from simple color enhancements and resealing to repairs and major rehabilitation. The end result is a new look that comes at a fraction of the cost of removing or replacing concrete.

*SunRestore Stamp Concrete Rehab system rejuvenates your battered stamped concrete back to beautiful!*

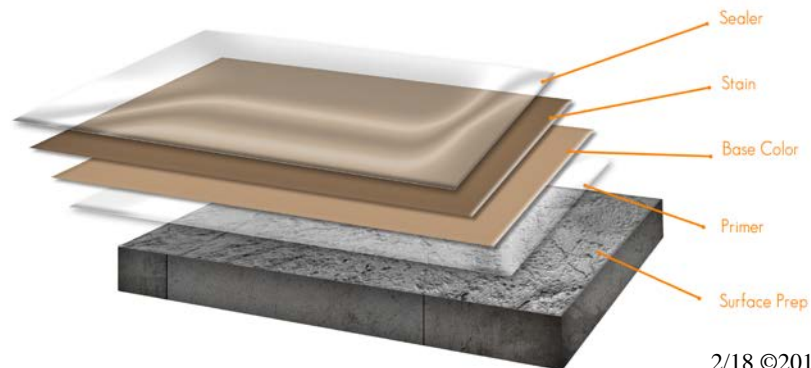



### Sundek Products Utilized\*

- SunEpoxy 54 or 400
- SunStain SunH2O
- SunStain SunDye Interior/Exterior
- Sundek Finish Coat
- Sundek Finish Coat Clear
- SunClear EcoClear
- SunSeal A25 Premium
- SunClear HT Clear

\*Actual Products used will vary depending on the level of

### Product Descriptions

**SunEpoxy 54** is a two-component water-based epoxy system with a rapid cure time. A good primer and an excellent color coat.

**SunEpoxy 400** is a two-component water-based epoxy system with an exceptional adhesion quality. A superior primer and an excellent color coat.

**SunStain SunH2O** is a water-based non-acid polymer bonded stain system that penetrates and adheres to the concrete surface to produce vibrant long lasting UV resistant color staining to any concrete surface.

**SunDye Interior/Exterior** is a translucent, UV stable dye, designed to penetrate any concrete surface. Can be combined and layer in multiple colors to create a marbled effect.

**Sundek Finish Coat** is a water-based acrylic copolymer coating developed to provide a protective topcoat to decorative concrete applications. Available in 12 standard colors and Clear.

**SunClear EcoClear** is a two component, water-based aliphatic polyurethane topcoat clear sealer that provides an excellent combination of high gloss, hardness, stain resistance and gloss retention under heavy traffic.

**SunSeal A25 Premium** is a single component, solvent-based, acrylic copolymer protective topcoat clear sealer designed for optimal adhesion to unsealed or untreated concrete.

**SunClear HT (High Traffic) Clear** is a two component, high solids aliphatic polyurethane topcoat clear sealer that provides a hard, yet flexible, coating. Additionally, it provides the highest level of protection from abrasion, stains, and wear in high traffic applications.

### Application Instructions

#### **Minor Rehab Indoors**

- Surface is prepared, removing flaky sealer or topping, and deglossing surface
- Clean the surface thoroughly
- Spray apply colored SunEpoxy (colored to customer desires)
- Adjust coloration to meet customer approval using SunH20 and/or SunDye
- Apply EcoClear or Finish Coat Clear

#### **Minor Rehab Outdoors**

- Surface is prepared by sanding or acid wash
- Clean the surface thoroughly
- Spray apply colorant (Oxides, Stains or Dyes)
- Adjust coloration to meet customer approval

#### **Major Rehab**

- Surface is prepared by sanding, grinding or acid wash
- Any required surface repairs are made
- Clean the surface thoroughly
- Prime the surface with SunEpoxy 54 or 400
- Spray apply a new color base with Sundek Finish Coat
- Stain or Dye to meet the customer design requirements
- Seal with Sundek Finish Coat Clear or upgrade to EcoClear